

AIP BELARUS

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
6000

Alt set: - hPa (mm on req)
-QNH (QFE on req)

MINSK APP	125.900
MINSK RADAR	125.250
MINSK TOWER RWY 13R/31L	118.300
MINSK TOWER RWY 13L/31R	130.400
MINSK-2 ATIS	128.850 EN 135.850 RUS

MINSK-2
RNAV RWY 31L

AGNEF2B, ARZIM2B
KUBIN2B, OSMUS2B
SORFO2B, TAZIP2B.

RNAV 1 APPROVAL REQUIRED. OTHERWISE ADVISE ATC.

EXPECT DIRECT ROUTING/SHORTCUTS BY ATC WHENEVER
POSSIBLE (ESPECIALLY DURING OFF-PEAK HOURS, SEE GEN 4.1
POINT 8).

INITIAL CLIMB

CLIMB AND MAINTAIN 6000 FT.

CLIMB TO A HIGHER LEVEL ONLY WHEN CLEARED BY ATC.

THE MINIMUM CLIMB GRADIENTS ARE AS FOLLOWS

(REQUIRED FOR SEPARATION REASONS):

-5.9% FOR SID ARZIM 2B UP TO FL 100;

-5.7% FOR SID TAZIP 2B UP TO FL 150;

-Vmax 230Kt FOR SID ARZIM 2B UP TO FL 100.

WARNING

IF UNABLE TO COMPLY PDG REPORT AT FIRST CONTACT
WITH MINSK GND.

RADIO COMMUNICATION FAILURE PROCEDURE

SET TRANSPONDER TO 7600.

IF AVAILABLE CALL TELEPHONE NUMBER +375172157600.

ATTEMPT TO LAND AT THE AERODROME OF DEPARTURE.

IF UNABLE TO LAND AT THE AERODROME OF DEPARTURE:


CONTINUE ASSIGNED AND ACKNOWLEDGED SID;

AFTER REACHING THE LAST ASSIGNED FLIGHT LEVEL, CONTINUE
FURTHER CLIMB TO FPL FLIGHT LEVEL IN 3 MINUTES.

IF BEING VECTORED

SET TRANSPONDER TO 7600.

CONTINUE ON ASSIGNED HEADING AND FLIGHT LEVEL FOR 3
MINUTES, THEN PROCEED DIRECT TO FINAL SID POINT,
CLIMBING TO FPL FLIGHT LEVEL.

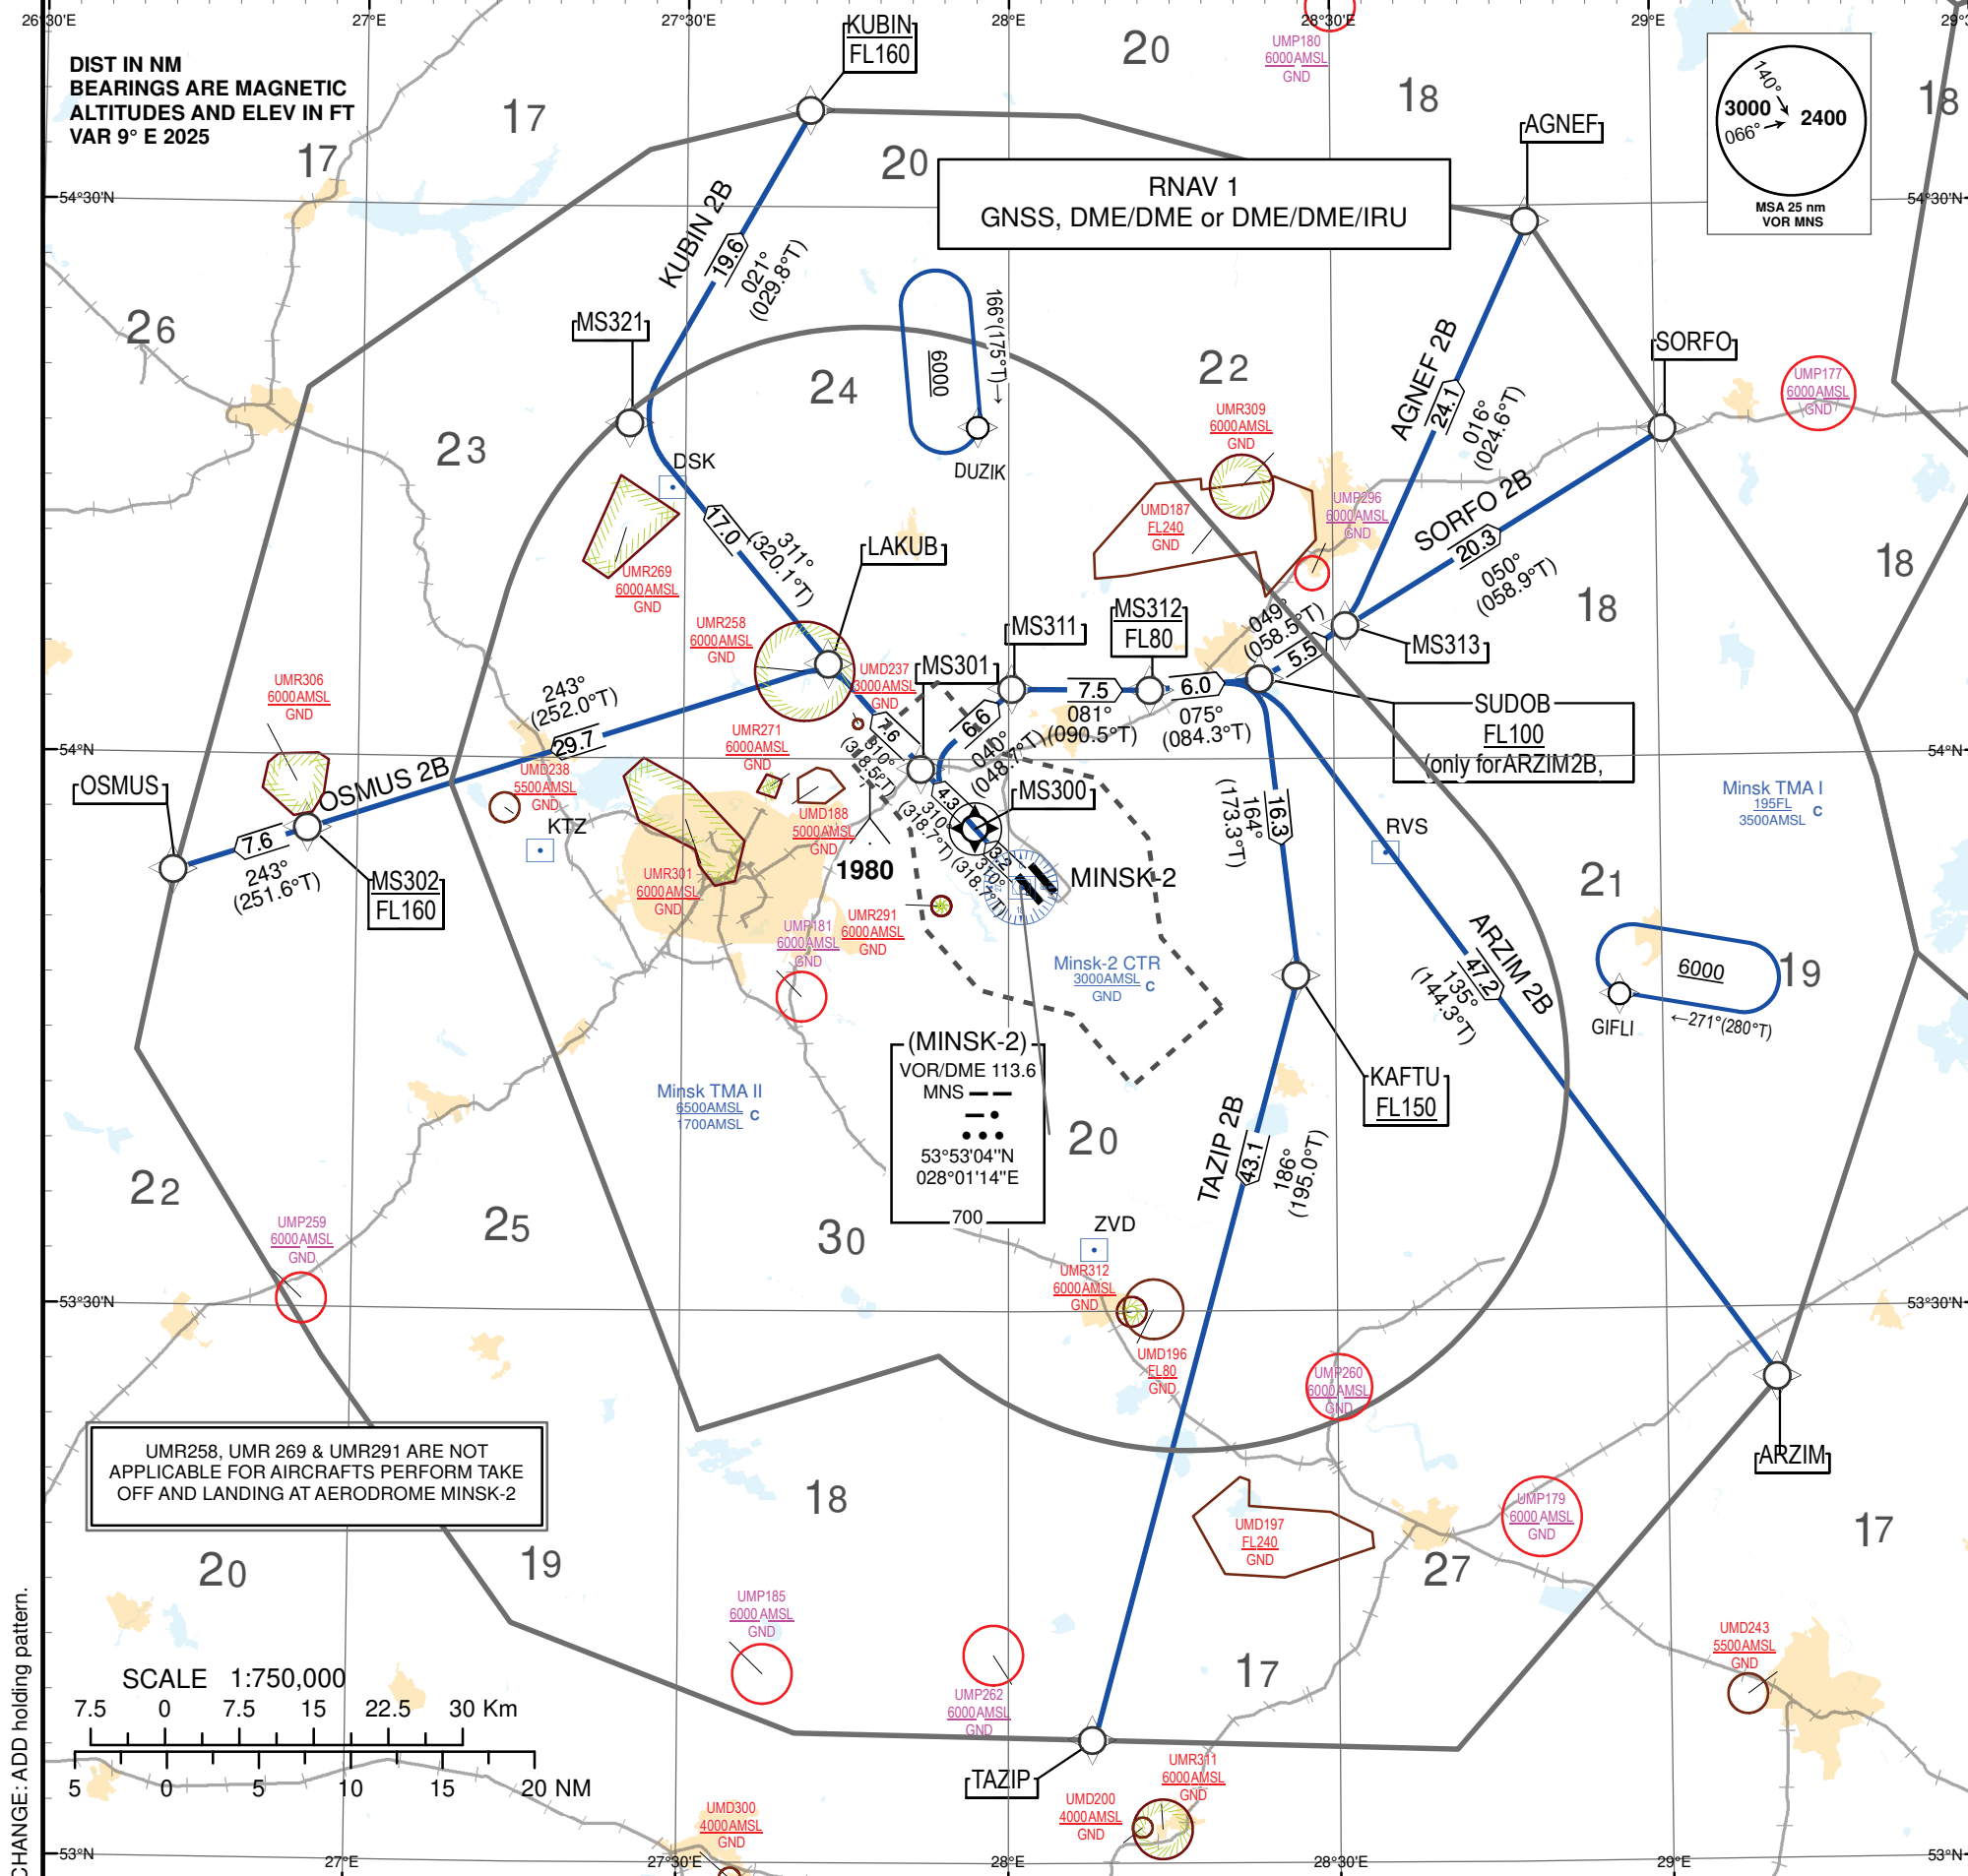

CHANGE: ADD holding pattern.

TABULAR DESCRIPTION

AGNEF2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	MS311	-	040(048.7)	9	6.6	-	-	-	RNAV1
004	TF	MS312	-	081(090.5)	9	7.5	-	-FL80	-230	RNAV1
005	TF	SUDOB	-	075(084.3)	9	6.0	-	-	-250	RNAV1
006	TF	MS313	-	049(058.5)	9	5.5	-	-	-	RNAV1
007	TF	AGNEF	-	016(024.6)	9	24.1	-	-	-	RNAV1
ARZIM2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	MS311	-	040(048.7)	9	6.6	-	-	-	RNAV1
004	TF	MS312	-	081(090.5)	9	7.5	-	-FL80	-230	RNAV1
005	TF	SUDOB	-	075(084.3)	9	6.0	-	+FL100		RNAV1
006	TF	ARZIM	-	135(144.3)	9	47.2	-	-	--	RNAV1
KUBIN2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	LAKUB	-	310(318.5)	9	7.6	-	-	-	RNAV1
004	TF	MS321	-	311(320.1)	9	17.0	-	-	-250	RNAV1
005	TF	KUBIN	-	021(029.8)	9	19.6	-	-FL160	-	RNAV1
OSMUS2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	LAKUB	-	310(318.5)	9	7.6	-	-	-	RNAV1
004	TF	MS302	-	243(252.0)	9	29.7	-	-FL160	-250	RNAV1
005	TF	OSMUS	-	243(251.6)	9	7.6	-	-	-	RNAV1
SORFO2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	MS311	-	040(048.7)	9	6.6	-	-	-	RNAV1
004	TF	MS312	-	081(090.5)	9	7.5	-	-FL80	-230	RNAV1
005	TF	SUDOB	-	075(084.3)	9	6.0	-	-	-250	RNAV1
006	TF	MS313	-	049(058.5)	9	5.5	-	-	-	RNAV1
007	TF	SORFO	-	050(058.9)	9	20.3	-	-	-	RNAV1

STANDARD DEPARTURE CHART
INSTRUMENT (SID) – ICAO

RNAV HOLDING INDIFICATION

Path Descriptor	Holding Fix	Inbound MAG Track° (True Track°)	Altitude (ft) / Flight Level	Time / Distance outbound	Turn Direction
HM	DUZIK	166(175.0)	+6000	1.5 MIN	R
HM	GIFLI	271(280.0)	+6000	1.5 MIN	R

TAZIP2B										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
001	CF	MS300	Y	310(318.7)	9	3.2	-	-	-210	RNAV1
002	TF	MS301	-	310(318.7)	9	4.3	-	-	-	RNAV1
003	TF	MS311	-	040(048.7)	9	6.6	-	-	-	RNAV1
004	TF	MS312	-	081(090.5)	9	7.5	-	-FL80	-230	RNAV1
005	TF	SUDOB	-	075(084.3)	9	6.0	-	-	-250	RNAV1
006	TF	KAFTU	-	164(173.3)	9	16.3	-	+FL150	-	RNAV1
007	TF	TAZIP	-	186(195.0)	9	43.1	-	-	-	RNAV1

WAYPOINT LIST

Waypoint Identifier	Coordinates	
AGNEF	542909.0N	0284822.0E
ARZIM	532614.0N	0291013.0E
DUZIK	541844.3N	0275718.9E
GIFLI	534705.9N	0285644.0E
KUBIN	543517.0N	0274141.0E
LAKUB	540511.0N	0274333.0E
MS300	535615.5N	0275655.6E
MS301	535929.2N	0275207.0E
MS302	535604.6N	0265537.3E
MS311	540349.9N	0280030.3E
MS312	540346.9N	0281315.4E
MS313	540715.6N	0283120.6E
MS321	541814.1N	0272501.3E
OSMUS	535341.0N	0264321.0E
SORFO	541749.0N	0290055.0E
SUDOB	540423.0N	0282323.0E
TAZIP	530643.0N	0280749.0E

THIS PAGE INTENTIONALLY LEFT BLANK